

DLA series DLA208


Line Array System



DLA208 is a medium sized line array speaker with accurate coverage angle, light weight and high SPL. It uses low distortion mid-bass unit, high quality HF driver with special waveguide and horn, accurate and uniform coverage over the effective frequency range. The whole hanging system adopts aluminum alloy material, humanized design makes the system fast installation and ensures safety, and can be used in combination with multiple speakers. Unit configuration: 2x8" high efficiency mid-bass units, 1x1.4" exit throat 75mm voice coil HF drivers. The wood box adopts multilayer composite plywood, wear-resistant and waterproof polyurea paint.

DLA208是一款中型、覆盖角度精准的线性阵列音箱，它具有比较小的体积和较轻重量，较大的声压级，应用低失真中低音单元，高品质驱动器配上专用波导管加号角，在有效频率范围内，覆盖精确和均匀，吊挂系统采用全部采用铝合金材质，人性化设计整个系统安装快捷并保证安全。单元配置：2只8"高效率中低音单元，1只1.4"喉口75芯高音驱动器；箱体采用多层复合夹板，耐磨聚脲喷涂。

CONFIGURATION

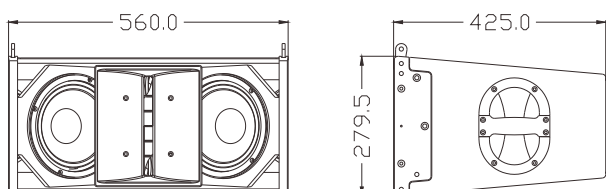

FEATURES

- High quality plywood with wear-resistant and waterproof polyurea paint
- High quality neodymium components
- Special line array horn
- Small cabinet, light weight, high SPL
- Convenient for supporting, hanging and stacking
- Good used for moving performance, small scale theater, stadiums and odeums.

系统特征

- 高品质单元配置，专用波导管加号角：保证音质，投射精准
- 多种组合使用方式：可吊挂、堆码、安装快捷

适用范围

- 多功能厅、高级会所、会议室、报告厅
- 流动演出、体育场馆扩声

MODEL
FREQUENCY RESPONSE(-3dB)
FREQUENCY RESPONSE(-10dB)
DRIVERS

RATED POWER
SENSITIVITY
MAXIMUM SPL
IMPEDANCE
DISPERSION(-6dB)

CROSSOVER FREQUENCIES
INPUT CONNECTORS
PACKAGE SIZE
NET WEIGHT
GROSS WEIGHT

DLA208
 80Hz-18kHz
 75Hz-20kHz
 2×8"(200mm)/2"voice coil LF
 1×1.4"(36mm)/3"voice coil HF
 300W RMS,1200W peak
 98dB 1watt/1 metre
 123dB continuous,129 dB peak
 8 ohms nominal
 Horizontal coverage: 90°
 Vertical coverage: Varies, depending on array length and configuration
 900Hz passive
 2×Speakon NL4
 515mm×370mm×660mm
 20 kg/pc
 23 kg/pc