

MRseries MR15C MR15CA

Two-way Loudspeaker System



The **MR15C** is a high precision and high power stage monitor, made of high quality plywood with polyurea paint. It offers a "studio monitoring" type of response, exceptional dynamic capability and very low distortion. Fitted with one 15" woofer and one 1" exit neodymium compression driver coupled to a patent 90° x 40° horn. MR15CA is equipped with FA1.6 digital amplifier module based on MR15C to be an active monitor.

MR15C是一款15寸同轴两分音全音域舞台监听音箱，采用一只15寸高效率中低音单元和一只1寸喉口44芯强磁驱动器，配置专门设计的90° x 40°号角。箱体采用多层复合夹板，聚脲喷涂制作。MR15CA是在MR15C的基础上配置FA1.6功放组件成为有源音箱。



FEATURES

- High quality plywood with polyurea waterproof paint
- Neodymium HF driver
- Compact two-way passive system
- Patent 90° x 40° horn


产品特点

- 高质量单元配置，高强度夹板箱体
- 超长品质保证期：品质与信心的保证

适用范围

- 多功能厅、高级酒店会所
- 流动商演、乐队扩声以及舞台返送音箱

CONFIGURATION

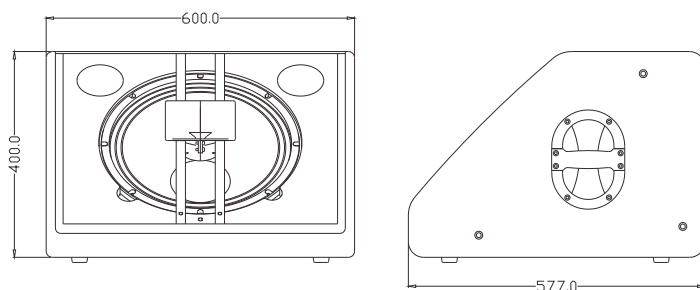

MODEL

FREQUENCY RESPONSE(-3dB)
FREQUENCY RESPONSE(-10dB)
DRIVERS

RATED POWER
SENSITIVITY
MAXIMUM SPL
IMPEDANCE
DISPERSION(-6dB)
CROSSOVER FREQUENCIES
INPUT CONNECTORS
PACKAGE SIZE
NET WEIGHT
GROSS WEIGHT

MR15C

50Hz-18kHz
45Hz-20kHz
1×15"(385mm)/3"voice coil LF
1×1"(25mm)/1.7"voice coil HF
400W RMS,1600W peak
98dB 1watt/1 metre
124dB continuous,130dB peak
8 ohms nominal
90° × 40°
2.2kHz passive
2×Speakon NL4
687mm×510mm×715mm
29 kg/pc
33 kg/pc

MR15CA

50Hz-18KHz
45Hz-20kHz
1×15"(300mm)/3"voice coil LF
1×1"(25mm) / 1.7"voice coil HF
600W/8Ω
--
124dB continuous,130dB peak
--
90° × 40°
--
INPUT TYPE: Balanced Differential line
687mm×510mm×715mm
31 kg/pc
35 kg/pc